

AGRICULTURAL WHEELS



Inspire The Transformation

AGRICULTURAL and MULTI-PURPOSE WHEELS

RIM DIAMETER	WHEEL SIZE	TIRE SIZE	JANTSA PART NUMBER	CENTER HOLE (mm)	P.C.D. (mm)	HOLE TYPE	NUMBER OF BOLT HOLES	OFFSET (mm)
12"	7.00x12 H2	220/60-12 23x8.50-12	70128	94	140	A1	5	0
			70129	110	160	A1	5	inset -10
			70132	93	140	Ø16mm	10	inset 48
			70133	90	120	Ø14mm	6	inset -8
			70136	94	140	A1	5	0
			70146	161	205	A2	6	0
14"	5.50Jx14	185/70R14 195/70R14	550149	94	140	A1	5	0
	6.00Jx14H2	205 R14 C	601404	161	205	A2	6	inset 5
	7.00x14H2	9,5Lx14	14700	90	150	Ø15mm	6	inset 20
15"	3.00Dx15	5.00-15	0985	Connected lug 3				
	5.00Fx15	7.00-15	15500	92,3	127	A(Ø14.8/18.5/90°)	4	0
	5.00Fx15	7.00-15	15500	92,3	127	A(Ø14.8/18.5/90°)	4	0
	6.00x15	7.00-15 7.50-15TR	15600	114.3	152.4	A-Ø15/Ø18.5/90°	6	inset 29
			15601	190.85	241.3	A-Ø17.5/Ø23.8/90°	8	6,5
			15606	122.55	165.1	A-Ø17.5/Ø23.8/90°	8	13
			15615	79.5	114.3	A(Ø14/Ø18/60°)	5	0
	6.00Jx15H2	225/70R15	601508	60	100	B1	4	inset 30
			601509	161	205	A2	6	inset 70
	6.00-15	7.50-15 205/70R15	60159	161	205	A2	6	0
			60168	176	225	A2	10	inset -50
	6.50-15	7.50-15 205/70R15	65154	152.4	203.2	B-Ø17.5/Ø23/90°	8	inset -35
			65510	161	205	A2	6	0
	8x15	225/70R15 235/70R15 240/80 R 15 27x10,50-15 27x9,50-15 11L-15 9,5L-15	15804	117.55	152.4	A-Ø15/Ø19/90°	6	inset 50
			15825	90	150	Ø15mm	6	25.5
			15826	161	205	A2	6	inset -57
			15833	101	140	Ø15mm	6	inset -2.5
	10x15	29x12.5 -15 29x13.5 -15 320/70R15 280/70R15 380/60-15	10152	117.5	152.4	A-Ø15/Ø21/90°	6	inset 22.5
			10155	161	205	Ø19.5mm	6	inset 10
			10175	161	205	A2	6	inset 35
			10176	94	140	Ø15mm	5	inset -25
			10177	161	205	A-Ø19/Ø27/90°	6	inset 6
	13x15	31x15.5 - 15 33x15.5 - 15 400/45 R15	13153	93.5	140	Ø15mm	10	
			13155	117.4	152.4	A-Ø15/Ø20/90°	6	-6.6
			13162	161	205	A2	6	0
			13163	161	205	A2	6	inset -37
			13169	94	140	B1	5	0
			13408	93.3	140	Ø15mm	5	inset -16
			13416	107	139	Ø17.5mm	5	inset -120
			13426	94	140	A-Ø15/Ø27/R16	5	inset -55
			13430	161	205	A2	6	inset -70
			13431	161	205	A2	6	inset -55

Not all items are listed in this catalog. Please contact us for any application that you do not see in this catalog.

*Marked part numbers are Adjustable Wheels.



AGRICULTURAL and MULTI-PURPOSE WHEELS

RIM DIAMETER	WHEEL SIZE	TIRE SIZE	JANTSA PART NUMBER	CENTER HOLE (mm)	P.C.D. (mm)	HOLE TYPE	NUMBER OF BOLT HOLES	OFFSET (mm)
15.3"	9.00X15.3	10.0/11.5 - 15.3 10.0/75 - 15.3 12.5/80 - 15.3 320/80 R15.3 300/80 R15.3 260/70 R15.3	91535	161	205	A2	6	inset -8
			91538	161	205	A2	6	0
			91543	94	140	A1	5	0
			91592	142	190	A-	8	inset -30
			91595	90	125	Ø13mm	5	27.7
			91603	93.2	140	A-Ø15.3/Ø27/R14	5	inset -30
			91612	96	140	A1	5	inset -6
			91615	161	205	A2	6	inset 20
			91620	161	205	A2	6	0
15.5"	13.00x15.5	400/60-15.5 400/55-15.5 400/50-15.5 400/45-15.5	130155	161	205	A2	6	0
			130156	161	205	A2	6	inset -35
			130158	161	205	A2	6	inset -15
			130704	152.4	203.2	A(Ø16.6/Ø23/90°)	8	0
			130705	161	205	B2	6	0
			130718	161	205	A2	6	inset -15
16"	4.00x16	6.00-16	40139	85	130	Ø12.5mm	4	inset -24
	4.50x16	6.00-16 6.50-16	45111	117.55	152.4	A-Ø14.2/Ø18/90°	6	45
			45112	161	205	A2	6	0
			45125	94	140	A1	5	0
			45127	85	130	Ø15.5mm	4	44.5
			45135	135	175	A-Ø20/Ø25/90°	5	inset -25
			45143	95	140	A1	5	inset 46
	5.00x16	6.00/6.50-16 6.50/7.00-16	50113	94	140	A1	5	0
	5.50x16	6.50/7.00-16 7.50-16	55104	161	205	A2	6	0
			55105	117.55	152.4	A(Ø14.2/Ø19.8/90°)	6	inset 20
			55130	127	165	A-Ø16.7/Ø21/R12	5	inset -12
			55609	117.55	152.4	A-Ø15/Ø19/90°	6	inset 28.6
			55622	85	130	Ø15mm	4	29,75
			55635	118	152.4	A-Ø17/Ø23/90°	6	inset 27
			55642	110	165	A1	5	0
	5.50Kx16H2	195/75R16C 205/75R16C	550174	146	203.2	B34	5	116.5
	5.50-16	7.50-16	55121	161	205	A2	6	0
			55124	161	205	B-Ø21.5/Ø26/R16	6	135
			55317	152.4	203.2	B(Ø17.5/Ø23/90°)	8	23
	6.00x16	9.00-16	16611	122	162	A-Ø18/Ø25/90°	6	inset -4.5
			16612	145	190	A-Ø20/Ø27/90°	8	inset -4.5
			16614	112	152.4	Ø20mm	6	inset 25
			16615	163.5	205.5	Ø19mm	6	28.25
			16624	152.4	203.2	B-Ø17.4/Ø22.2/90°	8	inset 28.5
			16625	90	150	Ø15mm	6	38
			16629	90.3	150	Ø15mm	6	inset 33
			16631	117.5	152.4	A-Ø12/Ø18/90°	6	inset 29
			60147	146	203.2	A-Ø29/Ø34/R22	5	inset -23.5
			60605	145	190	A-Ø20/Ø27/90°	8	inset -4.5
	6.00-16	7.50-16	16650	161	205	A2	6	0
	6.50x16	9.00-16	65105	161	205	A2	6	0
	6.50-16	9.00-16	71600	161	205	A2	6	0
	7.00-16	9.00-16	16754	161	205	A2	6	0
	W7.50x16	230/80 - 16						

Not all items are listed in this catalog. Please contact us for any application that you do not see in this catalog.
*Marked part numbers are Adjustable Wheels.

AGRICULTURAL and MULTI-PURPOSE WHEELS

RIM DIAMETER	WHEEL SIZE	TIRE SIZE	JANTSA PART NUMBER	CENTER HOLE (mm)	P.C.D. (mm)	HOLE TYPE	NUMBER OF BOLT HOLES	OFFSET (mm)
16"	W8x16	10.5/65 - 16 230/80 - 16 10,00-16 250/80 - 16 270/75 - 16	16800	161	205	A2	6	0
			16801	117.55	152.4	A-Ø14.2/Ø18/90°	6	0
			16805	117.55	152.4	A-Ø14.2/Ø18/90°	6	inset -13.5
			16825	110	160	A1	5	inset -20
			16826	117.55	152.4	A-Ø14.2/Ø18/90°	6	inset -25.5
			16830	165	210	A-Ø20/Ø25/R22	6	inset -3.5
			16848	152.6	203.2	A-Ø17/Ø22/90°	8	54
			16849	153.8	203.2	Ø21mm	8	inset -17.5
			16887*	80	135	Ø18mm	8	Inset 87
	W10x16	11.00-16SL 270/75 R16 280/70 R16 300/70 R16	16018	152.4	203.2	A-Ø16.6/Ø22.6/90°	8	inset -38
			16019	117.4	152.4	A-Ø15/Ø19/90°	6	Inset 28.5
			16022	142	185	Ø19mm	6	inset -30
	11LBx16 H2	13.0/55 R16 13.0/75 R16 14.0/65 R16 340/55 R16	11160	161	205	A2	6	inset -15
	W12x16	13,6 R 16	16120	117.6	152.4	Ø15mm	6	inset -48
16.1"	W10x16.1	13,50-16 10SL 16,5L-16,10	16110	132	170	A-Ø20/Ø24.6/60°	6	inset -81
17"	13.00x17	15.0/55 R17 420/55 R17 380/55 R17	130170	161	205	A2	6	0
			130173	161	205	A2	6	inset -40
			130177	221	275	A2	8	0
			130180	161	205	A2	6	inset -85
			130185	152.4	203.2	A-Ø16.6/Ø22/90°	8	inset -16
			130193	152.4	203.2	A-Ø16.6/Ø22.6/90°	8	inset -38
			130195	161	205	A2	6	inset -40
			130199	93	140	Ø16mm	10	inset -31
			130500	161	205	A2	6	inset -45
			130504	155	203.2	A-Ø14.5/Ø26.2/R14	8	103.5
			130527	221	275	A2	8	inset -50
	16.00x17	19/45 R17 480/45 R17 520/50 R17	160170	161	205	A2	6	0
			160171	161	205	A2	6	inset -35
			160173	221	275	A2	8	0
			160179	221	275	A2	8	inset -35
			160180	152.4	203.2	A-Ø17.5/Ø23/90°	8	inset -38
			160181	161	205	A2	6	inset -50
			160186	161	205	A2	6	inset -70
17.5"	17.5x6.75	9 R 17.5 9.5 R 17.5 10 R 17.5 215/75 R 17.5 225/75 R 17.5 235/75 R 17.5	675105	221	275	B2	8	141
			675108	161	205	A2	6	0
			675134	203.2	241.3	Ø16.6mm	9	inset -32
			675136	176	225	B33	10	145
			675143	161	205	B2	6	145
			675153	161	205	B2	6	125
			675162	121.3	165.1	Ø17.4mm	8	0
			675173	221	275	B2	8	132
			675174	161	205	B2	6	132
			675704	221	275	A2	8	141
			675708	221	275	A2	8	0
	17.5x10.5	14 R 17.5	105175	273	314.3	A-Ø17,4/Ø21,6/90°	8	15
			105184	152.4	203.2	A-Ø16,5/Ø22,5/90°	8	inset 6
			105185	221	275	Ø20.6mm	8	inset -76
			105191	202	241.3	A-Ø17,4/Ø23,8/90°	9	inset -25.4
			105192	221	275	A2	8	0
			105201	154	203.2	A-Ø17,5/Ø23,8/90°	8	0

Not all items are listed in this catalog. Please contact us for any application that you do not see in this catalog.

*Marked part numbers are Adjustable Wheels.

AGRICULTURAL and MULTI-PURPOSE WHEELS

RIM DIAMETER	WHEEL SIZE	TIRE SIZE	JANTSA PART NUMBER	CENTER HOLE (mm)	P.C.D. (mm)	HOLE TYPE	NUMBER OF BOLT HOLES	OFFSET (mm)
18"	5.50x18	7.50 R18	55185	85	130	Ø15mm	4	inset 34
	6.00x18	7.50-R18	18600	90	150	Ø15.5mm	6	65
	9x18	10.5/80 R18 12.5/80 R18	18931	161	205	A2	6	0
			18932	221	275	A2	8	0
			18981	149	203.2	Ø20.5mm	5	-160
			18982	115.1	152.4	Ø15mm	6	inset -60
			18984	221	275	Ø20.6mm	8	inset 31
			18988	160.8	205	Ø20mm	6	inset 20
			19004*	221	275	Ø19mm	8	inset 42
	W9x18	10.5/80 R18 12.5/80 R18	18900	161	205	A2	6	0
			18914	221	275	A2	8	0
	11x18	340/80 R18 340/80 R18 320/65 R18	11189	221	275	A2	8	0
			11190	161	205	A2	6	0
			11199	221	275	A3	8	0
			11200	221	275	B3	8	inset 40
			11300	221	275	A2	8	inset 55
	W11x18	340/80R18 340/80 - 18 320/65 R 18	11182	161	205	A2	6	0
			11183	221	275	A2	8	0
	W13x18	15.0/70-18	13181	221	275	A2	8	0
	13x18	15.5/70 R18 405/70 R18	13184	161	205	A2	6	0
			13185	221	275	A2	8	0
			13188	221	275	B3	8	0
			13189	152.4	203.2	Ø18mm	8	25
	13x18H2	15.5/70 R18 405/70 R18	13194	161	205	B2	6	0
			13195	221	275	A3	8	0
			13500	221	275	A3	8	0
			13506	221	275	B3	8	inset 40
	13-18	15.0/70 R18	18131	221	275	A2	8	0
			18132	221	275	A3	8	0
			18134	165	210	A-20/Ø26/R22	6	0
			18135	145	190	Ø20mm	8	0
			18137	161	205	A2	6	0
19"	3.62x19	6.00-19	36219	115	152	Ø15mm	6	30
	4.50x19	7.50-19	45190	117.7	152.4	B-Ø15/Ø18/90°	6	55

Not all items are listed in this catalog. Please contact us for any application that you do not see in this catalog.

*Marked part numbers are Adjustable Wheels.



AGRICULTURAL and MULTI-PURPOSE WHEELS

RIM DIAMETER	WHEEL SIZE	TIRE SIZE	JANTSA PART NUMBER	CENTER HOLE (mm)	P.C.D. (mm)	HOLE TYPE	NUMBER OF BOLT HOLES	OFFSET (mm)
19.5"	19.5x7.50	10 R 19.5 11 R 19.5 265/70 R 19.5	750194	161	205	A2	6	0
			750195	221	275	A2	8	0
			750301	161	205	A2	6	0
			750350	221	275	Ø24mm	8	156
	19.5x8.25	285/70 R 19.5	825100	161	205	A2	6	0
			825101	221	275	A2	8	0
	19.5x11.75	15 R 19.5 365/40 R 19.5 385/65 R 19.5	111953	161	205	A2	6	0
			111954	221	275	A2	8	0
			111966	281	335	A3	10	0
			111979	201.6	241.3	A-Ø17.4/Ø23.8/90°	9	inset 39.5
			111994	272.2	314.3	A-Ø16/Ø23.8/90°	8	72.4
			112005	161	205	A2	6	inset -50
			112028	285	335	A-Ø23.5/Ø38/R22.2	10	inset -12
			122700	117.6	152.4	Ø15mm	6	-48.5
	19.5x13.00	425/65 R 19.5 425/55 R 19.5 445/65 R 19.5	131961	221	275	A2	8	0
			131962	161	205	A2	6	0
			131963	281	335	A33	10	0
			131966	221	275	A3	8	0
			131971	285.75	335	A-Ø23.5/Ø38.1/R22.2	10	inset 21
			131984	176	225	B33	10	0
			131992	221	275	A2	8	inset -50
			131994	161	205	A2	6	inset -50
	19.5x14.00	445/65 R 19.5 445/45 R 19.5 435/50 R 19.5 425/55 R 19.5	141956	161	205	A2	6	0
			141957	221	275	A2	8	0
			141986	176	225	A3	10	0
			141990	161	205	A2	6	inset -75
			142016	201.6	241.3	A-Ø17.45/Ø23/90°	9	inset -13
			142035	281.5	335	B3	10	inset -75
20"	5.50x20	7.50-20	20552	170.5	220	A-Ø16/Ø20/90°	6	40
			20555	110	160	B1	5	20
	5.50-20	7.50-20	55202	161	205	A2	6	0
	6.00-20	8.25-20	60204	221	275	A2	8	0
	6.50-20	9.00-20	65202	161	205	A2	6	0
			65214	221	275	A3	8	0
	W7x20	210/95 R 20 250/85 R 20	72200	102	161	Ø14.5mm	6	inset 52
	7.00-20	9.00-20	70102	161	205	A2	6	0
	W8x20	250/85R20 275/80R20	82000*	221	275	Ø19mm	8	inset 5
			82008*	153	203.2	Ø17mm	8	inset -22
	9x20	300/70R20 13/80R20 260/80R20 260/70R20 275/80R20	92026	161	205	A2	6	0
			92032	120.6	165.1	Ø15.9mm	8	0
			92040	110.1	150	Ø17mm	6	inset -55

Not all items are listed in this catalog. Please contact us for any application that you do not see in this catalog.
*Marked part numbers are Adjustable Wheels.



AGRICULTURAL and MULTI-PURPOSE WHEELS

RIM DIAMETER	WHEEL SIZE	TIRE SIZE	JANTSA PART NUMBER	CENTER HOLE (mm)	P.C.D. (mm)	HOLE TYPE	NUMBER OF BOLT HOLES	OFFSET (mm)
20"	W9x20	320/85R20	92027	203.2	241.3	A-Ø16.2/Ø22.2/90°	9	inset 27.5
		250/85R20	92038*	152.4	203.2	Ø17mm	8	inset 53
		11.2R20	92048	161	205	B-Ø21.5/Ø27/90°	6x6	inset 30
	W10x20	12 R20	20105*	221	275	Ø19mm	8	-39
		320/85 R20	20108	221	285.75	Ø21.5mm	10	-14
		280/85 R20	20502	117.6	152.4	Ø15mm	6	inset -23.5
	10-20	14.00-20	10201	161	205	A2	6	0
	11x20	340/80 R20	20123	161	205	A2	6	0
		375/75 R20	20125	221	275	A2	8	0
		335/80 R20	20312	221	275	A3	8	inset 45
		365/80 R20	20314	221	275	B3	8	0
		405/70 R20	20318	221	275	A2	8	inset -17
		360/80 R20						
	W11x20	320/85R20	20128	222.4	275	Ø20.6mm	8	16
		380/70R20	20331	201.6	241.3	A-Ø17.5/Ø23/90°	9	0
	11-20	14.00-20	11201	161	205	A2	6	0
	13x20	420/65 R20	20143	221	275	A3	8	0
		420/75 R20	20150	221	275	A2	8	0
		425/75 R20	20155	221	275	A3	8	inset 10
		400/70 R20	20160	221.5	275	A-Ø25.5/Ø38/R22	8	inset -10
		16/70 R20	20170	221	275	A2	8	inset -25
	W13x20	380/75R20	20134	161	205	A2	6	0
		380/70R20	20197	221	275	A3	8	inset 70
		440/65R20	20207	221	275	A3	8	inset -40
	13-20	15.05.2020	13219	281	335	A3	10	0
			13222	221	275	A3	8	0
	14x20	420/75 R20	14213	221	275	A2	8	0
		420/70 R20	14215	161	205	A2	6	0
		460/65 R20	14216	152.4	203.2	Ø20mm	8	62.2
		16.0/70 R20	14229	291	335	A-Ø21.5/Ø38/R22.4	5	0
	W14x20	440/65R20 400/65R20	14218	152.4	203.2	Ø16.6mm	8	inset -50.7
			14228	201.6	241.3	A-Ø17.5/Ø27/90°	9	inset -39.7
			14233	152.4	203.2	A-Ø19/Ø24/R14	8	inset -10
	16x20	500/55 R20	160501	221	275	A2	8	0
			160502	161	205	A2	6	0
			160504	221.4	275	B3	8	inset 35.5
			160513	221	275	A2	8	inset -70
			160515	231	260	A1	12	0
			160518	221	275	A2	8	inset -50
	16Lx20	500/55 R20	160522	221	275	Ø23mm	8	inset -32

Not all items are listed in this catalog. Please contact us for any application that you do not see in this catalog.
*Marked part numbers are Adjustable Wheels.



AGRICULTURAL and MULTI-PURPOSE WHEELS

RIM DIAMETER	WHEEL SIZE	TIRE SIZE	JANTSA PART NUMBER	CENTER HOLE (mm)	P.C.D. (mm)	HOLE TYPE	NUMBER OF BOLT HOLES	OFFSET (mm)
20.25"	20.25x14.00	465/65R20.5	205143	221	275	A2	8	0
20.5"	20.5x14.00	465/65R20.5	205145	221	275	A2	8	0
	20.5x16.00	525/65R20.5	205160	281	335	Ø26mm	10	inset 70
			205162	281	335	Ø26mm	10	inset 60
			205163	281	335	B3	10	0
	20.5x18.00	24R20.5	205180	281	335	B33	10	0
			205181	281	335	A3	10	-50
22.5"	22.5x7.50	275/80 R 22.5 265/60 R22,5 10 R 22,5 11 R 22.5	750201	221	275	A2	8	0
			750202	161	205	A2	6	0
			750243	165.1	222.25	Ø19.8mm	6	0
			750244	281	335	A3	10	inset -150
			750289	121.1	165.1	Ø17.4mm	8	0
	22.5x8.25	11 R 22,5 12 R 22,5 275/80R22.5 295/80R22.5	825204	161	205	A2	6	0
			825205	221	275	A2	8	0
			825222	221	275	A3	8	0
			825256	281	335	A3	10	inset -159
			825274	152.4	203.2	B-Ø16.6/Ø20.6/90°	8	inset -35.3
			825298	152.4	203.2	A-Ø16.6/Ø22.6/90°	8	inset -38
			825511	152.4	203.2	B-Ø16.6/Ø20.6/90°	8	inset -35.3
			825525	281	335	A3	10	inset -159
	22.5x9.00	12R22.5 13R22.5 295/80R22.5 315/70 R 22,5 315/80 R 22,5	900220	161	205	A2	6	0
			900222	221	275	A2	8	0
			900223	221	275	A3	8	0
			900234	281	335	A3	10	0
	22.5x11.75	15R22.5 365/70R22.5 385/65R22.5	117555	221	275	A2	8	0
			117561	161	205	A2	6	0
			117579	221	275	A3	8	0
			117611	281	335	A3	10	0
			117612	201.6	241.3	Ø17.5mm	9	inset -3
			117695	221	275	A2	8	inset -70
			117698	152.4	203.2	A-Ø16.6/Ø22/90°	8	inset -33
			117721	281	335	B33	10	inset 34
	22.5x13.00	16.5R22.5 425/65R22.5 415/45 R 22,5	130247	281	335	B33	10	0
			130256	221	275	A2	8	0
			130268	221.2	285.75	Ø20.6mm	10	0
			130272	152.4	203.2	A-Ø16.6/Ø22/90°	8	0
			130274	152.4	203.2	A-Ø16.6/Ø22.6/90°	8	0
			130286	221	285.75	A-Ø30/Ø37.5/R22.2	10	0
			130302	221	285.75	Ø20.6mm	10	0
			130309	221	275	Ø24mm	8	inset 5.5

Not all items are listed in this catalog. Please contact us for any application that you do not see in this catalog.

*Marked part numbers are Adjustable Wheels.



AGRICULTURAL and MULTI-PURPOSE WHEELS

RIM DIAMETER	WHEEL SIZE	TIRE SIZE	JANTSA PART NUMBER	CENTER HOLE (mm)	P.C.D. (mm)	HOLE TYPE	NUMBER OF BOLT HOLES	OFFSET (mm)
22.5"	22.5x14.00	18R22.5 465/65R22.5 415/45 R 22,5 445/70 R 22,5	140216	221	275	A2	8	0
			140219	281	335	A3	10	0
			140260	281	335	A3	10	inset 40
			140281	281	335	A3	10	inset -50
	22.5x16.00	550/60 R22.5 500/45 R22.5	162493	281	335	Ø26mm	10	inset -25
	22.5xAG 16.00	550/60 R22.5 500/45 R22.5	162284	281	335	A3	10	0
	22.5xAG 16.00 H2	550/60-22.5 500/45-22.5	162291	221	275	A2	8	0
			162295	281	335	A3	10	0
			162306	281	335	A3	10	inset -50
			162307	281	335	A3	10	inset -50
			162319	281	335	A3	10	0
			162323	221	275	B2	8	inset -50
			162373	221	275	A2	8	inset -50
			162397	221	287.75	Ø20.5mm	10	inset -48
			162398	152.4	203.2	A-Ø16.6/Ø22/90°	8	inset -38
	22.5xAG 18.00 H2	560/55R22.5 560/60R22.5	180225	281	335	A3	10	0
	22.5xAG 20.00 H2	600/55 R22.5 650/50 R22.5 650/40 R22.5	200229	281	335	A3	10	0
			200232	281	335	A3	10	inset -50
			200233	221	275	A2	8	0
			200234	221	275	A2	8	inset -50
			200262	221	275	B3	8	10
			200507	281	335	A3	10	inset -60
			200555	221	285.75	Ø20mm	10	0
			200557	220	285.75	Ø25mm	10	inset -25
	22.5xAG 24.00 H2	700/50-22.5	200606	281.5	335	B3	10	inset -15
			240225	221	275	A2	8	0
			240233	281	335	A3	10	0
			240234	281	335	A3	10	inset -50
			240248	281	335	B3	10	inset -70
	22.5xAG 28.00 H2	850/40 B R26.5	240517	220	285.75	Ø25mm	10	inset -76
			225280	281	335	A3	10	0
23"	19.00x23	30/21.5R-23	190232	281	335	A3	10	inset -50

Not all items are listed in this catalog. Please contact us for any application that you do not see in this catalog.

*Marked part numbers are Adjustable Wheels.



AGRICULTURAL and MULTI-PURPOSE WHEELS

RIM DIAMETER	WHEEL SIZE	TIRE SIZE	JANTSA PART NUMBER	CENTER HOLE (mm)	P.C.D. (mm)	HOLE TYPE	NUMBER OF BOLT HOLES	OFFSET (mm)
24"	W7x24	240/85R24	72400	161	205	A2	6	inset -66.5
		240/85R24 9,5R24	72403*	221	275	Ø19mm	8	inset 80
	W8x24	250/85R24	24804	152.5	203.2	A-Ø16.6/Ø21.7/90°	8	inset -50
		240/85R24 9,5R24	24817*	152.7	203.2	A-Ø16.6/Ø20.8/90°	8	inset 80
	W9x24	320/85R24 280/85R24	24900	221	275	Ø18.5mm	8	inset 35
	W10x24	14.00-24	24113	161	205	B2	6	0
			24624*	145	190	B-Ø20/Ø25/90°	8	inset 47
			24629	152.4	203.2	Ø17.5mm	8	67 0
			24630	221	285	A-Ø32.5/Ø37.5/R22	8	inset 38
			24633	152.4	203.2	A-Ø16.6/Ø22/90°	8	
	W12x24	80/85 R 24 340/85 R 24 380/75 R 24	24310*	290.5	330	Ø16.5mm	8	114.7
			24367*	221	275	Ø21mm	8	0
			24409*	152.4	203.2	Ø16mm	8	inset -10
			24410*	153	203.2	Ø19mm	8	inset -35
	W12Lx24	80/85 R 24 340/85 R 24 380/75 R 24	24383*	221	275	Ø21.5mm	8	-63
			24393	152.52	203.2	A-Ø16.6/Ø20.8/90°	8	inset -50
	W13x24	380/70 R 24	13246	221	275	A2	8	0
			13266*	290.5	330	Ø16.5mm	8	inset 50
			13269	221	275	A3	8	inset -105
			13271	221	275	Ø24mm	8	inset 65
			13277	152.4	203.2	Ø15mm	8	inset -44
			13702*	152.4	203.2	Ø16mm	8	inset -44
	W14Lx24	420/70 R 24	14254	161	205	Ø17mm	6	inset 30
			14255	152.4	203.2	Ø19mm	8	67
			14261*	40				inset 50
	W15Lx24	16,5/85-24 IMP	24173	280	335	Ø23.8mm	10	26.2
			24174	153	203.2	A1	8	inset -
			24187	152.4	203.2	Ø15mm	8	117.2 inset
			24188	135	170	Ø17mm	6	-68 inset
			24189	282	335	A-Ø23.5/Ø32/R18	10	-124 inset
			24190*	110	152.4	Ø19mm	8	-45 inset
			24195	152.52	203.2	B-Ø16.6/Ø20.8/90°	8	-16.5 91
	DW16Lx24	500/70 R 24 460/70 R 24 19,5L 24 18,4 R24	16027	180	230	A-Ø20/Ø25/R22	6	inset -81
			16028	180	230	A-Ø20/Ø25/R22	6	inset -40
			16043	281	335	A3	10	0 40
			16052	221	275	B3	8	Inset 140
	DW18Lx24	540/70 R 24 500/70 R 24 21L 24	18026	145	210	B-Ø32/Ø37/R22	8	inset -50
			18032	281	335	B3	10	0
			18041	222.25	285.75	A-Ø28.5/Ø37/R22.3	10	

Not all items are listed in this catalog. Please contact us for any application that you do not see in this catalog.
*Marked part numbers are Adjustable Wheels.



AGRICULTURAL and MULTI-PURPOSE WHEELS

RIM DIAMETER	WHEEL SIZE	TIRE SIZE	JANTSA PART NUMBER	CENTER HOLE (mm)	P.C.D. (mm)	HOLE TYPE	NUMBER OF BOLT HOLES	OFFSET (mm)
24.5"	24.5x8.25	12 R 24,5	245825	152,4	203,2	B-Ø16,6/Ø20,6/90	8	inset -38
26"	DW20Bx26	23,1-26 620/75R26 620/70R26	20260	281	335	A3	10	0
			20262	281	335	A3	10	inset -
			20263	221	275	A2	8	100 0
			20282	221	275	Ø24mm	8	inset -41
			20289	152.4	230.2	Ø20mm	8	inset -75
			20298	281	335	Ø24mm	10	94.5
			20618	281	335	A3	10	inset -50
	DW25Bx26	28L-26 30.50L-26	25260	281	335	A3	10	0
			25276	221	275	Ø24mm	8	inset -91
			25282	220	285.75	Ø20.6mm	10	0
			25297	223.3	285.75	Ø20.6mm	10	inset -130
			25308	281	335	A3	10	inset -100
26.5"	26.5xAG 20.00 H2	600/65 R26.5 650/60 R26.5 600/55 R26.5 680/55 R26.5	200267	221	275	B2	8	inset -50
			200268	281	335	B3	10	inset -50
			200269	281	335	A3	10	0
			200275	281	335	B3	10	inset -100
			200295	281	335	A3	10	inset 20
			200811	281	335	A3	10	inset 40
			200825	302	340	A-Ø20/Ø25.5/R15	20	0
			200835	281	335	A3	10	0
	26.5xAG 24.00 H2	800/45 R26.5 750/45 R26.5 710/45 R26.5 750/55 R26.5	240266	281	335	A3	10	0
			240267	281	335	B3	10	inset -50
			240277	281	335	B3	10	inset -25
			240278	221	275	A2	8	inset -100
			240283	281	335	B3	10	inset -100
			240289	281	335	A3	10	inset -50
			240800	281	335	A3	10	inset -75
			240815	221	285.75	Ø24mm	10	0
	26.5xAG 28.00 H2	800/40 R26.5 850/40 R26.5	280265	281	335	A3	10	0
			280270	281	335	A3	10	inset -50
			280277	281	335	A3	10	inset -25
			280288	281	335	Ø26mm	10	0

Not all items are listed in this catalog. Please contact us for any application that you do not see in this catalog.

*Marked part numbers are Adjustable Wheels.



AGRICULTURAL and MULTI-PURPOSE WHEELS

RIM DIAMETER	WHEEL SIZE	TIRE SIZE	JANTSA PART NUMBER	CENTER HOLE (mm)	P.C.D. (mm)	HOLE TYPE	NUMBER OF BOLT HOLES	OFFSET (mm)
28"	W9x28	250/85 R 28 320/70 R 28 11,2 - 28	28901	161	205	B2	6	0
			28906*	180	230	B-Ø18/Ø23/90°	6	inset 105
	W10x28	360/70 R 28 320/70 R 28 12,4 - 28	28104*	109.5	152.4	B-Ø19/Ø25/90°	8	175
			28109*	109.5	152.4	B-Ø19/Ø25/90°	8	inset -91
	W11x28	12.5-28	28616	152.4	203.2	Ø16mm	6	inset -9
			28618*	152.4	203.2	Ø16mm	8	inset 0
	W11Lx28	380/85 R28 340/85 R28 320/85 R28	28603*	150.1	203.2	Ø19mm	8	inset -81
	W12x28	13.6-28	28126*	152.4	203.2	B-Ø19/Ø26,9/90°	8	inset 121.4
			28300	152.4	203.2	Ø17mm	8	inset 5
	W13x28	14,9-28	13290*	152.4	203.2	Ø20mm	8	inset 74
			13292*	152.4	203.2	A1	8	inset 50
	W13Lx28	14,9-28	13280*	152.4	203.2	Ø17mm	8	inset -35
	W14Lx28	16,5/85-28 420/85 R28 480/75 R28	14324	281	335	A-Ø22/Ø29/R18	10	0
			14327	290	335	A-Ø21/Ø36/R21.5	5	inset 32
			14332*	152.4	203.2	Ø21mm	8	inset 50
	W15Lx28	420/85 R28 480/75 R28	28173*	281	335	Ø24mm	5	inset 56
	W16Lx28	540/75 R28 480/75 R28	16280	151.2	203.2	Ø22mm	8	inset 50
30"	DW12x30	420/70 R 30	30120	101.701	165.1	B-Ø32.1/Ø36.9/ R22.2	6	31.5
	W13x30	420/70 R 30	30131*	150.1	203,2	Ø19mm	8	inset 20
	DWW13x30	480/70 R 30	30137*	221	275	Ø24 mm	8	inset -80
			30139	220	275	A-Ø22/Ø27/R15	8	0
	W14x30	480/70 R 30	30168*	150.1	203.2	Ø19 mm	8	inset -27.3
			30169	150.2	200	Ø17 mm	8	inset 120.5
	W14Lx30	480/70 R 30	30141*	150.8	200	Ø17mm	8	inset 100
			30171	221	275	B2	8	inset -15
			30147*	152.4	203.2	B-Ø19/Ø27/90°	8	inset 126.6
	DW14X30	480/70 R 30	30172	281	335	B3	10	inset 50
			30160*	152.4	203.2	B-Ø19/Ø25/90°	8	inset 131
	DW14LX30	480/70 R 30	30161	101.701	165.1	B(Ø32.1/Ø36.9/ R22.2)	6	inset 21.4
			30508	221	275	A2	8	0
			30517*	152.2	203.2	Ø19.8mm	8	0
	DWW15Lx30	480/70 R 30	30526*	152.4	203.2	Ø19mm	8	52
	DW18Lx30	600/70R30 540/65R30	30800	281	335	A3	10	inset 45
30.5"	30.5xAG 20.00 H2	650/65 R30.5 H2620/60 R30.5 710/50 R30.5	200312	281	335	A3	10	0
			200314	281	335	A3	10	inset -
			200315	281	335	B3	10	100 inset
			200337	281	335	A3	10	-50 inset
	30.5xAG 24.00 H2	750/60 - 30,5 710/50 - 30,5 750/60 R 30,5 800/45 R 30,5	240317	281	335	A3	10	-75 inset
			240221	281	335	B3	10	-50 0
			240339	281	335	B3	10	inset 90
			240350	281	335	B3	10	inset -25
	30.5xAG 28.00 H2	850/50 - 30,5 850/45 B 30,5 800/45 R 30,5 800/45 - 30,5 850/50 R 30,5	280312	281	335	A3	10	0
			280313	281	335	A3	10	inset -50
			280323	371	425	Ø25.4mm	12	inset -25
			280337	221	285.75	Ø20.6mm	10	0
			280344	220	287.75	Ø21mm	10	inset -28

Not all items are listed in this catalog. Please contact us for any application that you do not see in this catalog.

*Marked part numbers are Adjustable Wheels.

AGRICULTURAL and MULTI-PURPOSE WHEELS

RIM DIAMETER	WHEEL SIZE	TIRE SIZE	JANTSA PART NUMBER	CENTER HOLE (mm)	P.C.D. (mm)	HOLE TYPE	NUMBER OF BOLT HOLES	OFFSET (mm)
32"	W8x32	270/80R32	32804*	145	190	B-Ø20/Ø25/90°	6	inset 170
			32806	180	230	B-Ø20/Ø25/90°	6	inset -79.5
			32816	161	205	A2	6	inset 22
			32824 V-TRAC	390	430	Ø16.4mm	12	inset 60
	DW21Bx32	680/85R32 710/75R32 680/70R32 24,5R32	21321	281	335	A3	10	inset -50
			21322	221	275	Ø24mm	8	0
			21324	281	335	B3	10	0
			21331	281	335	B3	10	70
			21334	281	335	Ø24mm	10	inset 60
			21337	281	335	A3	10	inset -100
	DW27Bx32	900/70R32 800/70R32 850/60R32 900/55R32	27320	281	335	A3	10	0
			27324	281	335	Ø20.6mm	10	inset 38
			27331	281	335	B3	10	0
			27333	281	335	B3	10	inset -50
			27348	221	285.75	Ø20.6mm	10	0
			27367	281	335	A3	10	100
	DW30Bx32	900/70 R32 900/55 R32	30322	281	335	Ø24mm	10	0
	DW36x32	1050/50R32	36320*	221	275	Ø26mm	16	inset 11
34"	W15Lx34	480/70 R 34 520/70 R 34	34162*	221	275	Ø24mm	8	-80
			34164*	152.4	203.2	Ø19.5mm	8	92
			34170	152.6	203.2	Ø19.8mm	8	inset -60
			34178	221	275	A-Ø21/Ø27/R16	8	inset -100
			34185	152.4	203.2	B2	8	inset -130
			34193*	150.1	203.2	Ø19.8mm	8	inset -170
	DW15Lx34	480/70 R 34 520/70 R 34	34179	149.7	203.2	Ø19.8mm	8	inset -186
			34180	149.7	203.2	Ø19.8mm	8	inset 36
	DWW15Lx34	520/70 R 34	34157	150.1	203.2	Ø19.8mm	8	51
36"	W8x36	270/95 R 36 230/95 R 36 270/80 R 36	36806	161	205	A2	6	50
			36808*	161	205	A2	6	0
			36809 V-TRAC	390	430	Ø16.4mm	12	inset 60
	W9x36	320/85R36 270/80R36 12,4R36	36903*	152.4	203.2	B1	8	55.2
	W11x36	340/85R36 320/85R36 13,6R36	36111*	152.4	203.2	B1	8	30
	W11Lx36	340/85R36 320/85R36 13,6R36	36135*	150.8	203.2	Ø19mm	8	inset 116
	W12x36	13,6-36	36502*	152,4	203.2	B-Ø19/Ø26,9/90°	8	inset 112.5

Not all items are listed in this catalog. Please contact us for any application that you do not see in this catalog.

*Marked part numbers are Adjustable Wheels.



AGRICULTURAL and MULTI-PURPOSE WHEELS

RIM DIAMETER	WHEEL SIZE	TIRE SIZE	JANTSA PART NUMBER	CENTER HOLE (mm)	P.C.D. (mm)	HOLE TYPE	NUMBER OF BOLT HOLES	OFFSET (mm)
38"	DW10x38	11.2-38	10385	152.4	203.2	B(Ø21/Ø29.5/110°)	8	38
			10386	221	275	B3	8	38
			10388*	150.1	203.2	Ø19mm	8	inset -55
			10391 V-TRAC	390	430	Ø16.4mm	12	inset 80
	DW11x38	320/85R38	38503*	152.4	203.2	B1	8	76
			38514	199	250	A-Ø24/Ø30/90°	8	inset 113
	DW12x38	380/80R38	38126*	152.4	203.2	B-Ø19/Ø26.9/90°	8	inset 155.6
			38313	221	285.75	Ø20.6mm	10	0
			38317 V-TRAC	390	430	Ø16.4mm	12	inset 60
	DW12Lx38	380/80R38	38306*	149.7	203.2	Ø19.8mm	8	162
	DW14x38	15.50-38	38140*	152.4	203.2	B-Ø19/Ø26.9/90°	8	inset 115
			38143	281	335	A3	10	0
			38153*	199	250	B-Ø24/Ø30/90°	8	inset 173
	DW15Lx38	520/70 R38	15380	149.7	203.2	Ø19.8mm	8	36
		520/70 R38	15381	149.7	203.2	Ø19.8mm	8	inset 36
	DW16x38	520/70R38	16383*	152.4	203.2	A2	8	inset -130
	DW16Lx38	520/85 R38	16387	281	335	Ø24mm	10	inset 100
	DW18x38	580/70 R38	18382	40	-	-	-	inset -40
	DW20x38	620/70 R38	20801	40	-	-	-	inset -50
	MW23Bx38	710/70 R38	23382	281	335	A3	10	0
		650/60 R38	23383	281	335	A3	10	inset -50
	MW25Bx38	710/70R38	35380	613,5	662	Ø22mm	20	67
42"	W8x42	270/95R42 230/95R42	42800	199.5	250	B-Ø24/Ø28/90°	8	inset 125
			42801	161	205	B2	6	95
			42803 V-TRAC	390	430	Ø16.4mm	12	inset 62
	DD18LX42	520/85 R42 580/70 R42	42183	281	335	26	10	140
	MW25Bx42	650/85 R42 710/70 R42	23420	613	662	Ø22mm	20	108
		710/75 R42	25420	281	335	Ø24mm	10	143
44"	W8x44	9.5R44	44802	150.1	203.2	Ø19mm	8	inset 101.4
			44808	221	275	B2	8	inset 83
			44818*	152.4	203.2	Ø21mm	8	inset 101.4
			44823 V-TRAC	390	430	Ø16.4mm	12	inset -162
	W10x44	270/95 R44	44100 V-TRAC	390	430	Ø16.4mm	12	inset 62
46"	W12x44	380/90 R44	44120 V-TRAC	390	430	Ø16.4mm	12	inset 62
	W10x46	300/95 R46 270/95 R46 320/90 R46	46100 V-TRAC	390	430	Ø16.4mm	12	inset 62
	W12x46	380/90 R46	46120 V-TRAC	390	430	Ø16.4mm	12	inset 62
	W13x46	380/90 R46	46130 V-TRAC	390	430	Ø16.4mm	12	inset 62
48"	W8x48	270/95 R 48	48801*	152.4	203.2	Ø19.8mm	8	inset 120
			48812 V-TRAC	390	430	Ø16.4mm	12	inset 62
	W10x48	270/95 R48 230/95 R48	48100 V-TRAC	390	430	Ø16.4mm	12	inset 62
	W12x48	340/85 R48	48120 V-TRAC	390	430	Ø16.4mm	12	inset 62
50"	W10x50	320/90 R50	50200 V-TRAC	390	430	Ø16.4mm	12	inset 62
	W12x50	380/90 R50	50250 V-TRAC	390	430	Ø16.4mm	12	inset 62
52"	W8x52	270/95 R 52	50800 V-TRAC	390	430	Ø16.4mm	12	inset 62
	W10x52	300/95 R 52	52101 V-TRAC	390	430	Ø16.4mm	12	inset 62
	W12x52	380/90 R 52	52120 V-TRAC	390	430	Ø16.4mm	12	inset 62
54"	W10x54	320/90 R 54	54100 V-TRAC	390	430	Ø16.4mm	12	inset 62
	W12x54	380/90 R 54	54121 V-TRAC	390	430	Ø16.4mm	12	inset 62



Not all items are listed in this catalog. Please contact us for any application that you do not see in this catalog.

*Marked part numbers are Adjustable Wheels.

V-TRAC MULTI-PIECE *VARIOUS TRACK WHEELS*

JANTSA presents a new range of narrow adjustable wheels for tractors and agricultural machinery.

Thanks to the 3-piece design these wheels can be easily applied for different machines with various hub and track requirements. Adjustable Disc plate and interchangeable Adaptor Flange assure robust solution for versatile agricultural applications.

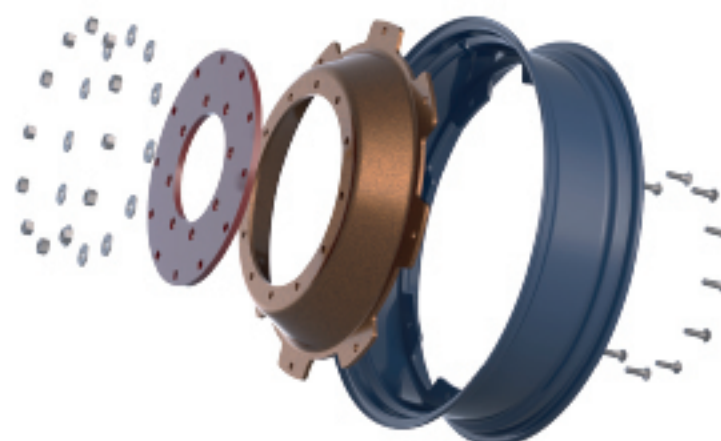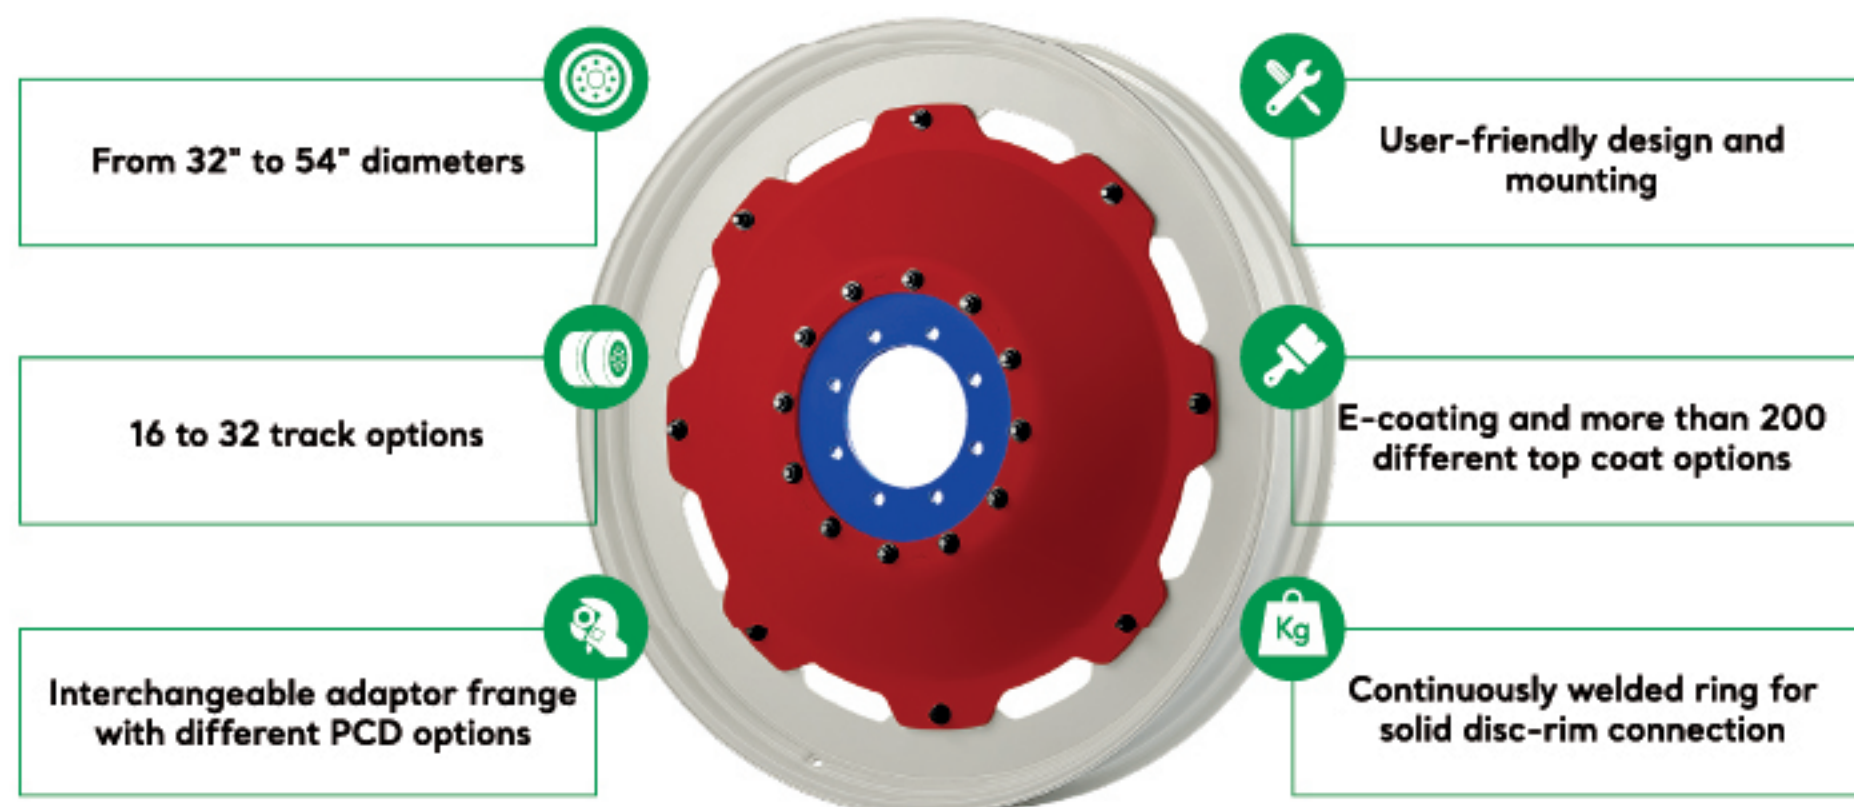

AVAILABLE SIZES				
RIM DIAMETER	8	10	12	13
32"	32824			
36"	36809			
38"		10391	38317	
42"	42803			
44"	44823	44100	44120	
46"		46100	46120	46130
48"	48812	48100	48120	
50"		50200	50250	
52"	52800	52120	52101	
54"		54100	54121	

ADAPTOR FLANGE OPTIONS			
PART NUMBER	NUMBER OF BOLT HOLES	CENTER HOLE	HOLE DETAILS
02479	8	290	18
02548	8	221	24
02550	10	281	27/32/R18 (A3)
02562	8	150,1	19,8
02565	8	152,4	19,8
02566	8	221	19,8
02567	8	139,7	21
02568	8	152,4	21
02577	8	152,4	19/24/R14 (B-)
02580	8	221	21
02632	0	40	0

WAFFLE WHEEL

JANTSA is one of the few worldwide manufacturers capable to produce waffle wheels with 8 different track options which is the most modern. This is the most design of adjustable wheels preferred by major tractor manufacturers.


WAFFLE WHEELS EXPLODED

CONVENIENCE

8 standard wheel offset positions, easy and quick track changing guaranteed.

HIGHER SPEED

Designed for high horse power tractors operating at speed up to 65 km/h.

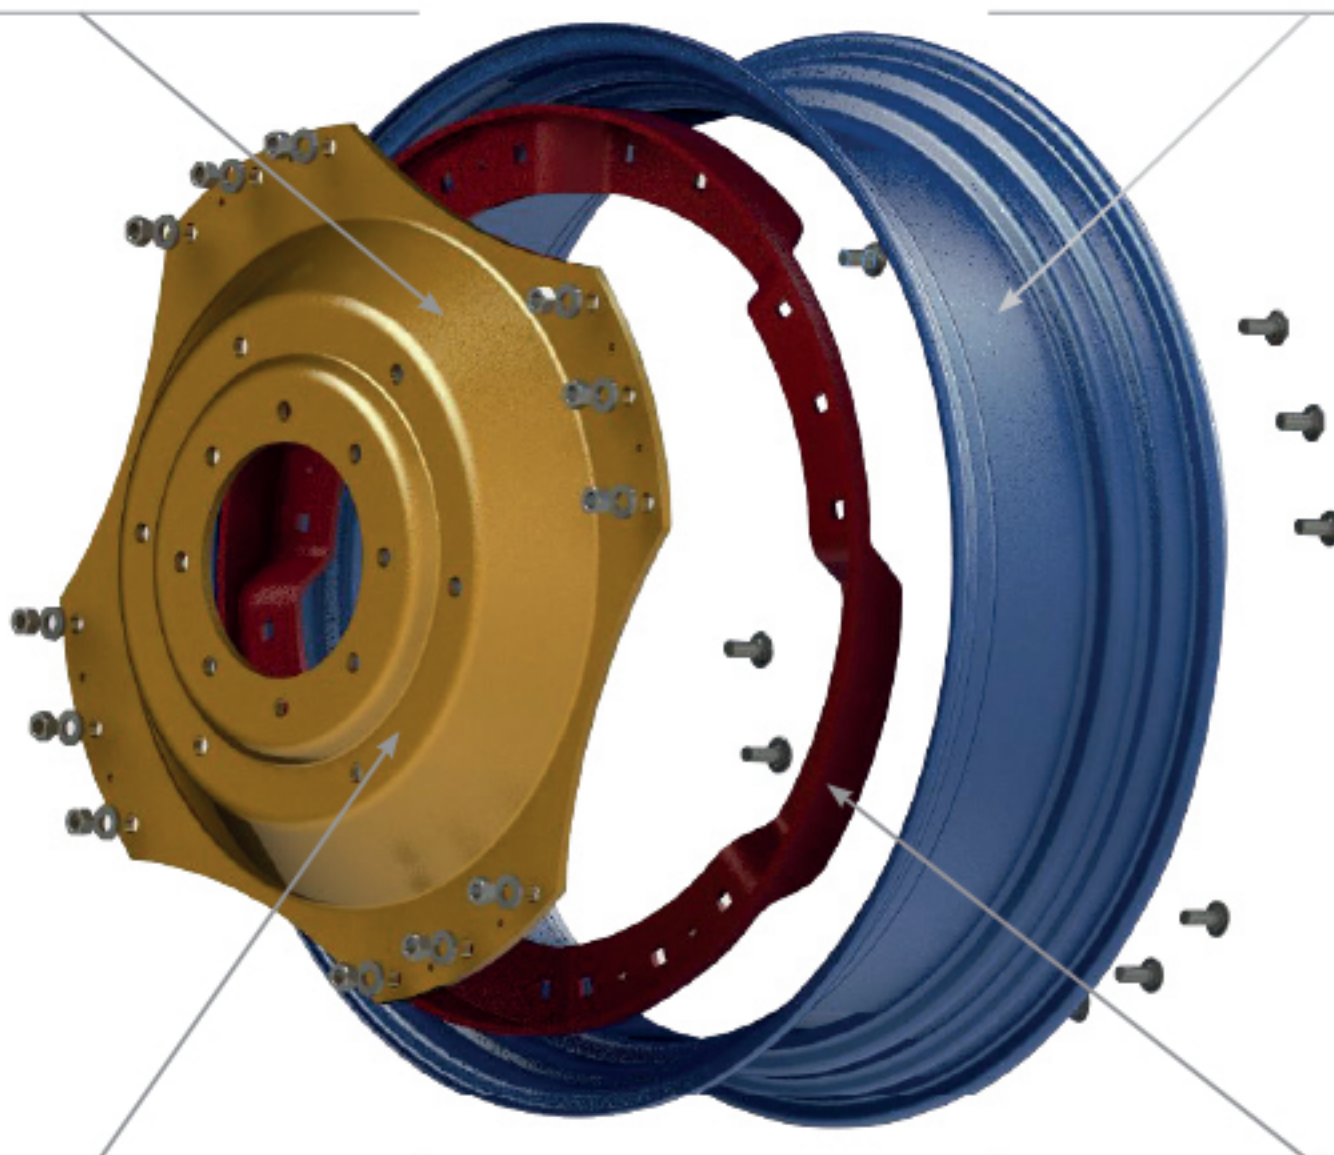

VARIETY

As of today we are capable to produce 22 wheel sizes in waffle wheels design. More sizes are coming within the next months!

HIGHER LOAD CAPACITY

The disc is connected to the rim with a continuous welded crown ring which assures higher load capacity compared to standart adjustable wheels.


WAFFLE WHEELS ZOOM IN



AVAILABLE SIZES

24" Diameter	26" Diameter	28" Diameter	30" Diameter	32" Diameter	34" Diameter	36" Diameter	38" Diameter
W7x24	DW16x26	W9x28	DW12x30	W8x32	DW10x34	W8x36	DW10x38
W8x24	DW20x26	W10x28	DWW13x30		DW13Lx34	W9x36	DW11x38
W9x24	DW25x26	W11x28	DW14x30		DW15Lx34	W11x36	DW11Lx38
W10x24		W11Lx28	DW14Lx30		DW16Lx34	W11Lx36	DW12x38
W10Lx24		W12x28	DWW15Lx30		DW18Lx34	W12x36	DW14x38
W12x24		W13x28	DW16Lx30				DW15Lx38
W12Lx24		W13Lx28	DW18Lx30				DW16x38
W13x24		W14Lx28	DW20Bx30				DW16Lx38
W14Lx24		W15Lx28	DW23Bx30				DW18Lx38
W15Lx24		W18Lx28					DW20Bx38
							DW23Bx38
							DW25Bx38

WAFFLE WHEELS WITH COLOR

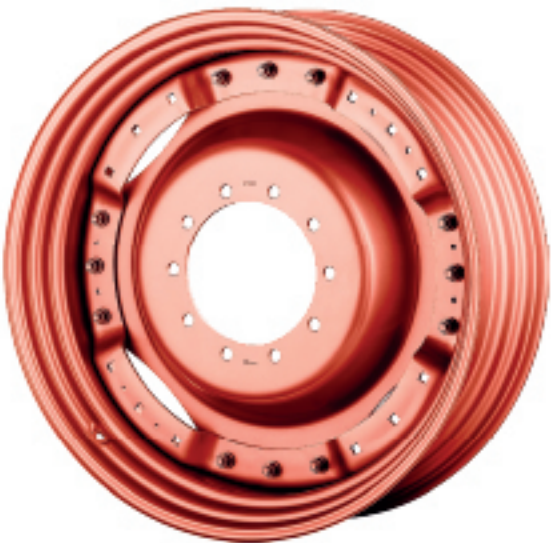




• OEM PREFERENCE



• INCREASE FLOTATION AND TRACTION




• DECREASE SOIL COMPACTION



• EASY TO MODIFY WITH 2" - 5" - 8" SPACERS



• HIGH TENSILE DISC MATERIAL USAGE

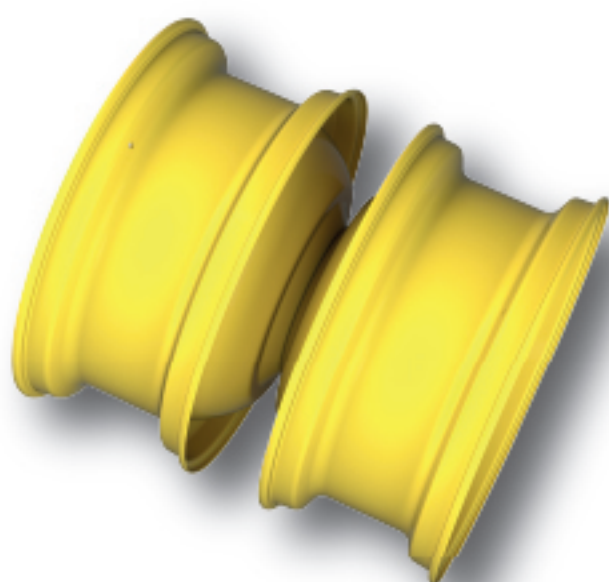


USAGE AREA:

COMBINE HARVESTERS

- Class VI - 268 HP - 323 HP
- Class VII - 324 HP - 375 HP
- Class VIII - 376 HP - 485 HP
- Class IX - 486 HP - 674 HP
- Class X - 675 HP +

AVAILABLE WHEEL SIZES	RECOMMENDED TIRE SIZES
DD18Lx42	20.8-42
	IF / VF 520/85R42 R-1/2W DUAL
	IF / VF 520/85R42 R-1/2W DUAL
	620/70R42
	650/85R42
MW23Bx38	20.8-38
	650/60R38
	650/75R38
	650/85R38
	710/65R38
	710/70R38
	710/75R38

FRICTION DRIVE SYSTEM

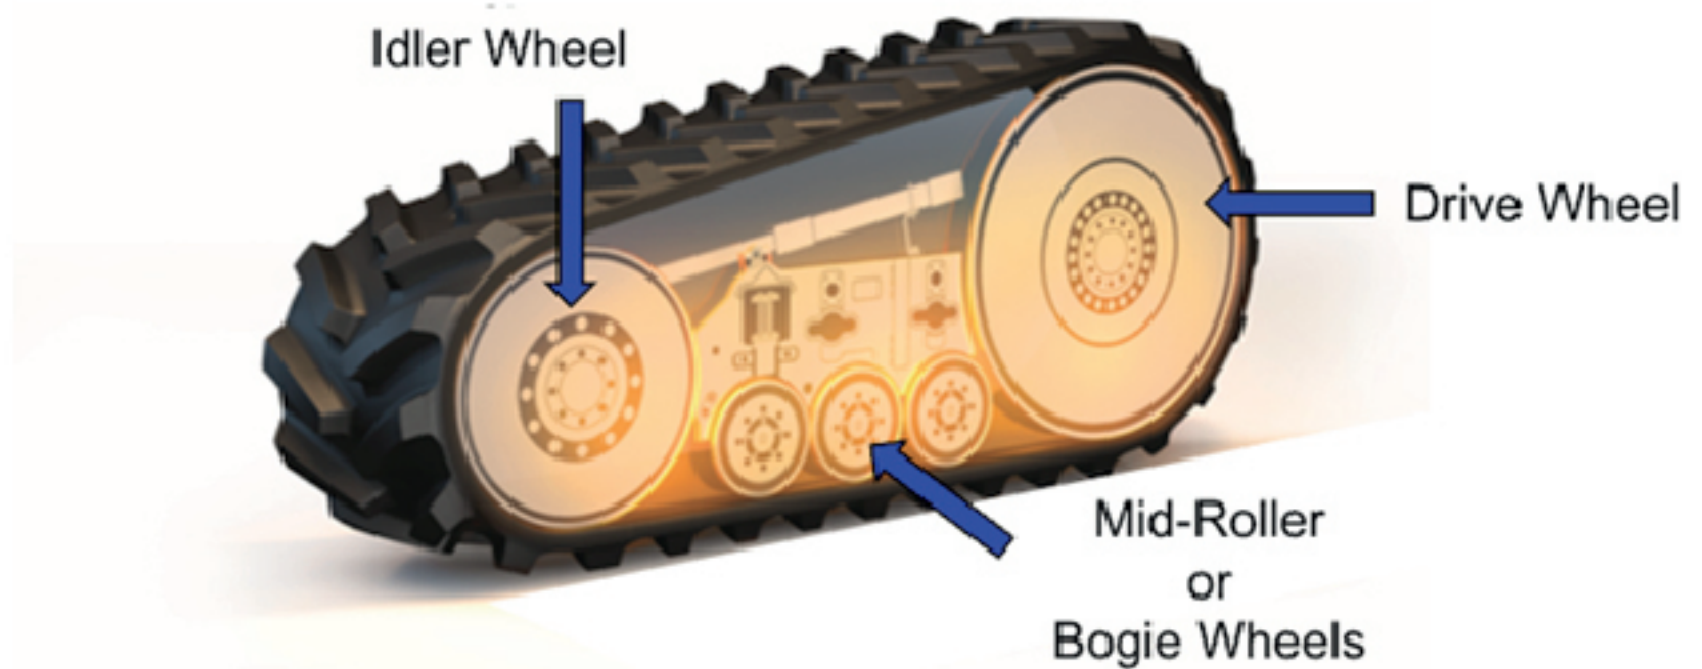

Friction Drive Benefits:


- Simple design with two guide wheels, two drive wheels, a track, and bogie/mid roller wheels to support.
- Typically have less problems with the undercarriage.
- Last much longer as there isn't as much adverse contact between the components.

Friction Drive Drawbacks:

- Friction Drive tracks (two tracks) are harder to ballast front to rear with cyclically loaded equipment.
- Friction Drive tracks lose much of its internal traction when moisture levels are too high (mud and/or water) resulting in difficulty maintaining forward direction or steering at times.

Usage Areas: Tractors, Combine Harvesters,

POSITIVE DRIVE SYSTEM

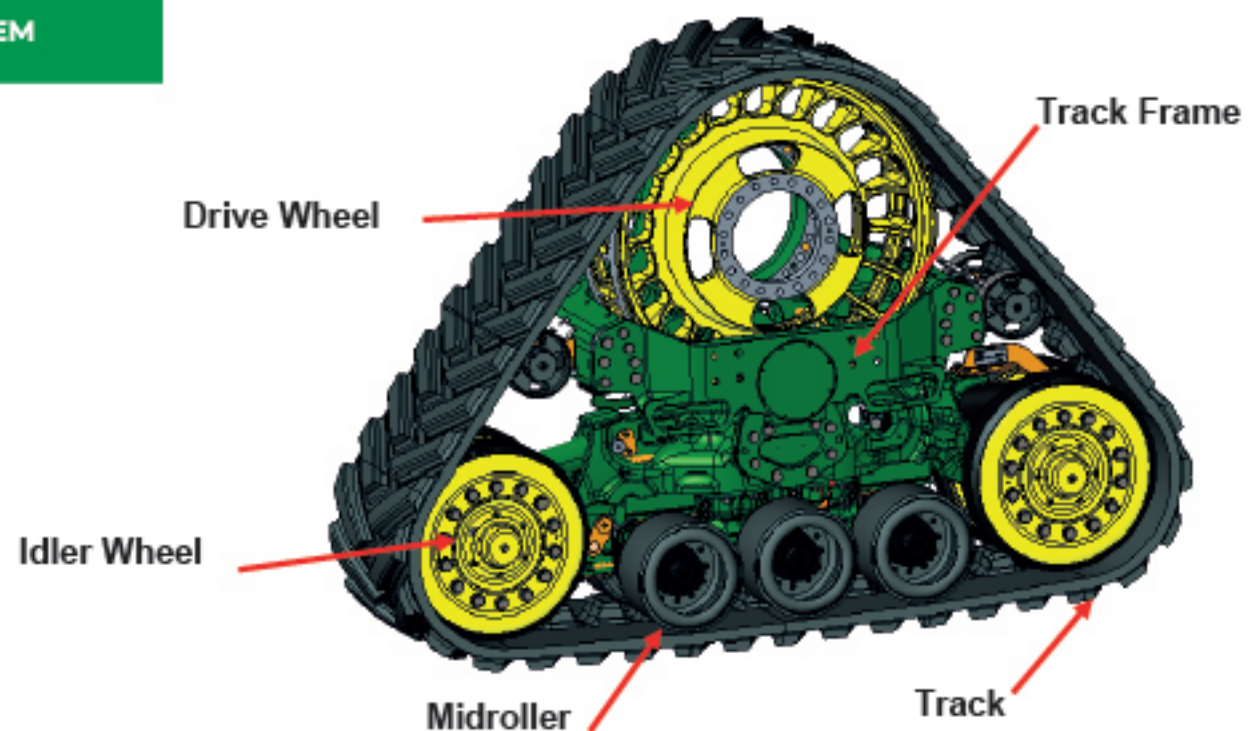

Positive Drive Benefits:


- More torque to the ground in difficult or high traction situations.
- Better control maintaining direction and turning in wetter conditions.

Positive Drive Drawbacks:

- Much lower lifespan than friction drive.
- Typically more problems with the undercarriage.
- Drive lugs are the workhorse of this track. Damage to the drive lugs from alignment, material ingestion, or over pulling greatly diminishes life expectancy of the track.

Usage Areas: Tractors, Combine Harvesters


TRAILED TRACK SYSTEM (TTS)

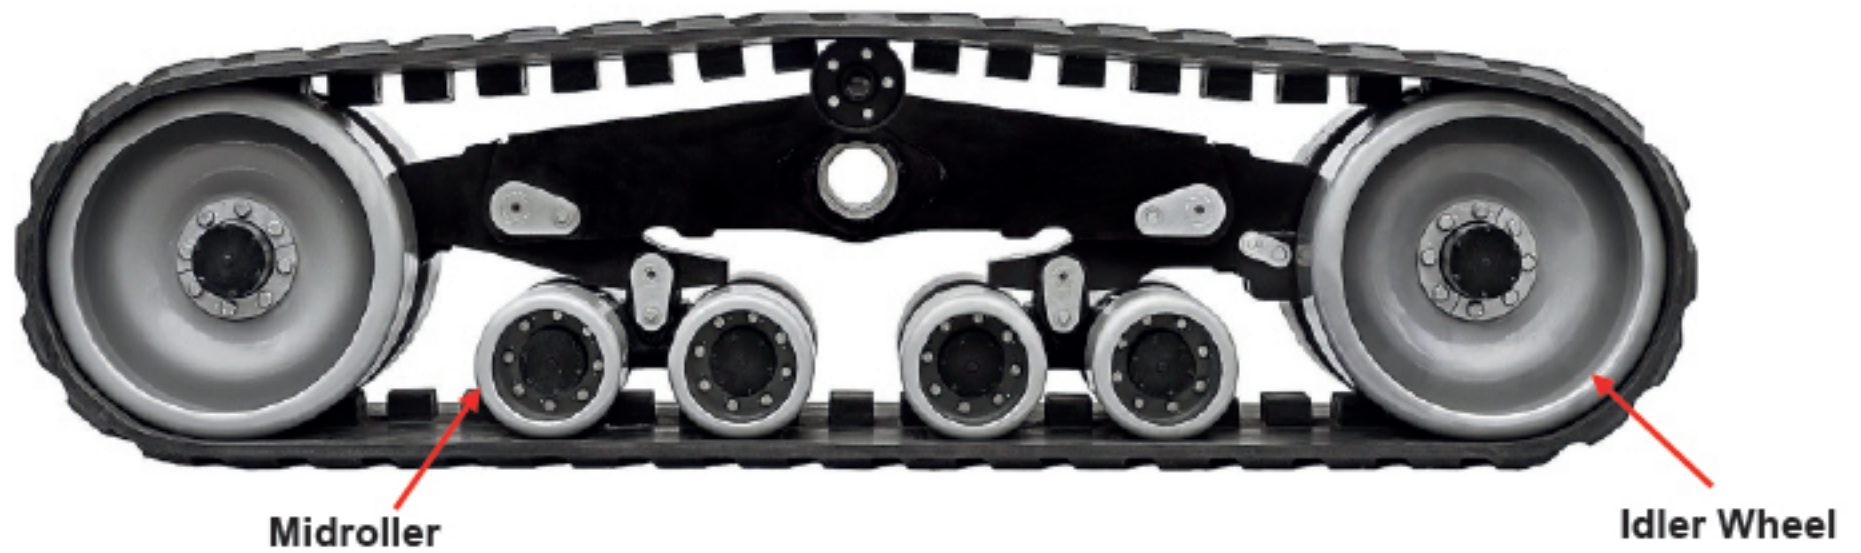

Trailed Track System Benefits:

- More torque to the ground in difficult or high traction situations.
- Designed for wide surfaces, allowing for higher weight capacity and low ground pressure operation.
- It offers low rolling and turning resistance for easier pulling.
- The perfect choice for high capacity planters, fertilizing vehicles and harvesting vehicles
- Improves cart stability and control
- Reduces point loads on undercarriage and cart frame compared to other track system designs
- Maximizes ground contact and support over uneven

Usage Areas: Fertilizer Equipments, Planter Carts, Sprayers, Harvest Carts

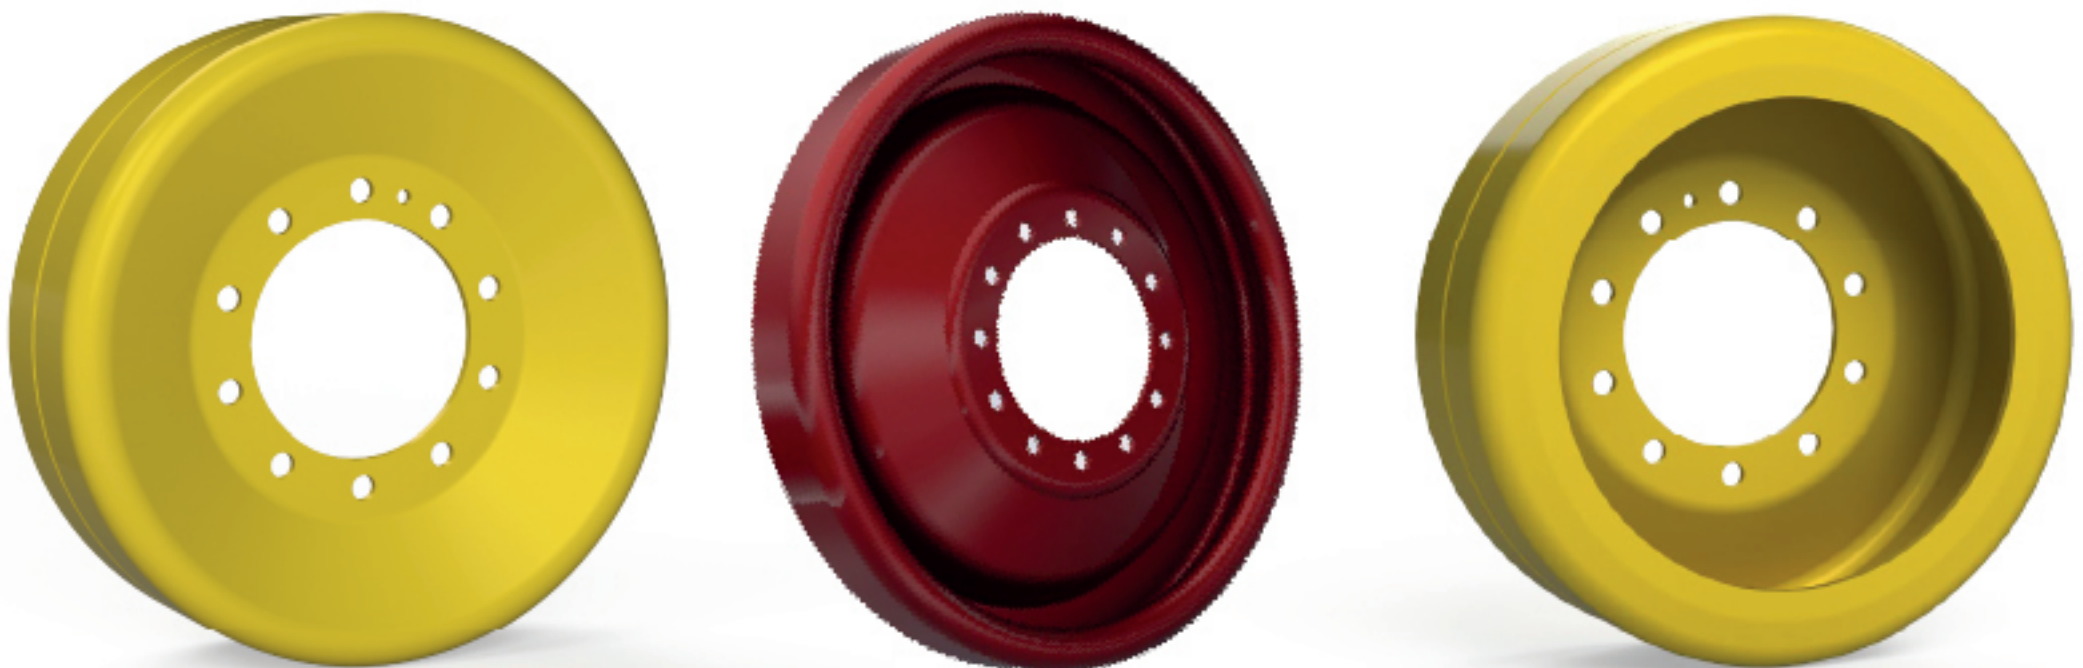





Umurlu Mah. Organize Sanayi Bölgesi Cad.
No: 58-59/1, 09630 Efeler-Aydın-Turkey



+90 (256) 259 11 25



+90 (256) 259 11 24



www.jantisa.com

 **Jantisa**